




RK ENGINEERING
FLOW SOLUTION

YST-F Y-STRAINER




"RK Engineering" strainers offered by us are designed and conform to the standards of as per ASME. Our Engineering team extends its complete assistance and support to the end customer at all levels in the process of execution of an order.

Size	: 1" (DN 25) – 24" (DN 600)
Design And Manufacturing	: As per Manufacturer std. / ASME B16.34
Flange Standard Conformity	: Flanged End - ASME B16.5 RF Butt Weld End – ASME B16.25
Inspection & Test	: API 598

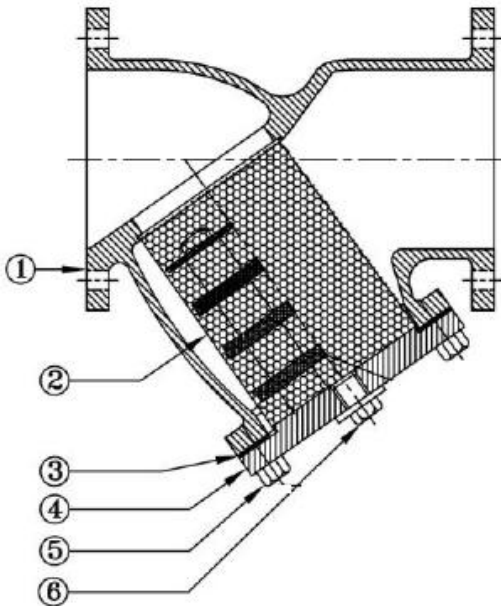

MATERIAL SPECIFICATION

1	Body	Cast Iron / Stainless Steel
2	Filter	Stainless steel
3	Gasket	Rubber / Non Asbestos
4	Cover	Cast Iron / Stainless Steel
5	Fasteners	Carbon Steel / Stainless steel
6	Drain Plug	Carbon Steel / Stainless steel

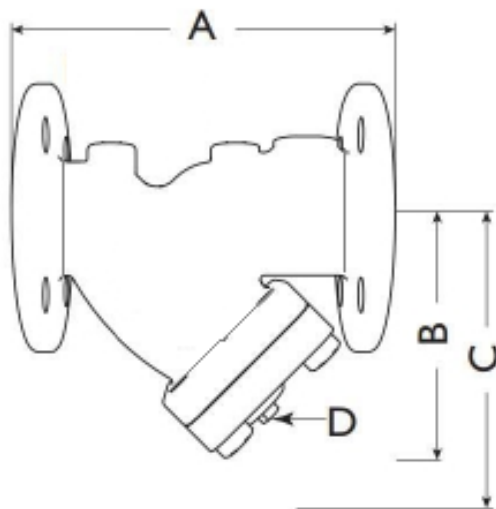

Valve Size	Port	A	B	C	NPT Plug D
1"	25	127	114	159	1/4
1.5"	40	165	121	166	1/4
2"	50	203	133	178	1/2
2.5"	65	216	166	248	1
3"	80	241	178	254	1
4"	100	292	210	305	1 ½
5"	125	356	286	508	2
6"	150	406	343	508	2
8"	200	495	394	578	2
10"	241	622	470	712	2
12"	286	698	553	762	2
14"	333	787	625	927	2
16"	382	914	673	1067	2
18"	433	978	787	1156	2
20"	476	978	991	1422	2
24"	590	1067	1143	1727	2

* Please consult our technical team for other materials, Actuators & Classes.

RK ENGINEERING

S.F. 171, 172/1, near to SNS Arts college,
Chinnavedampatti, Coimbatore, Tamil Nadu, 641049

<https://rkengineeringvalves.com>

Phone : +91 98430 59933
Email : rk@rkengineeringvalves.com